




GmbH

Your partner for door-, window- and facade engineering

**Muntin positioning- and
measurement device
for wooden- and plastic windows
SPM**

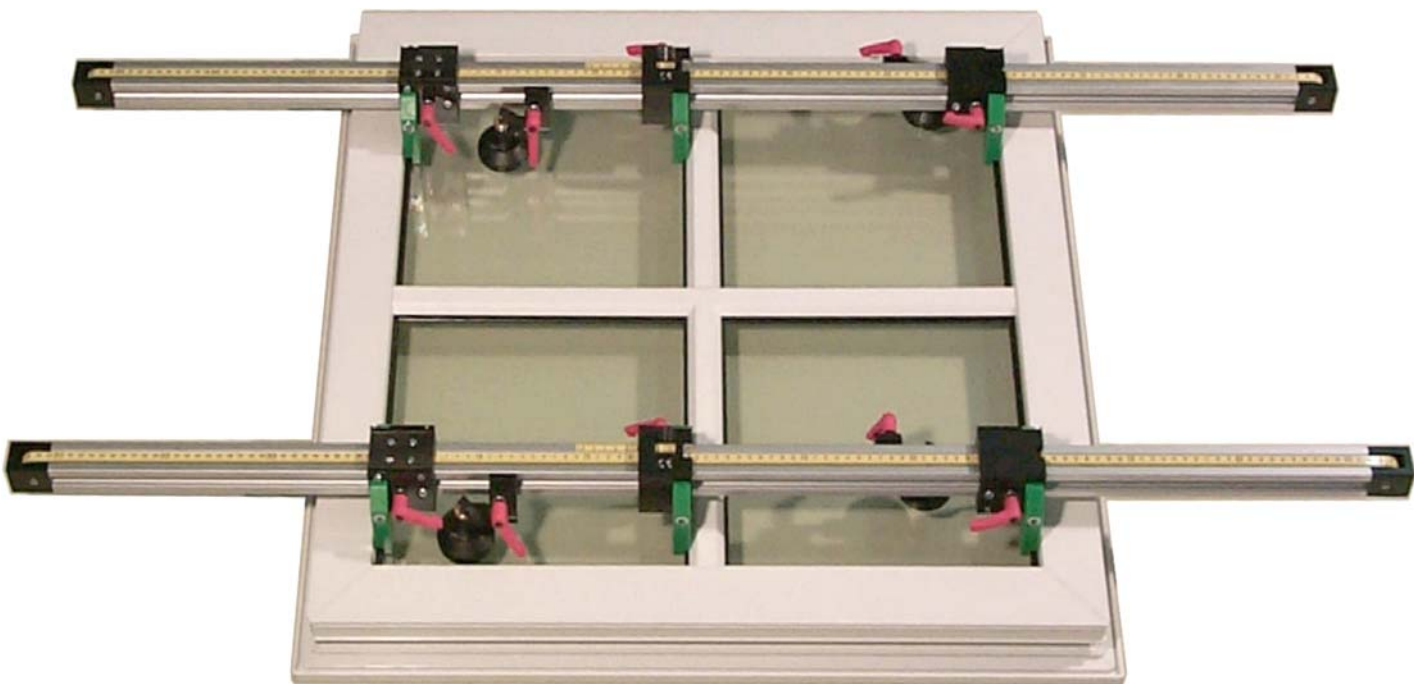

**Exact positioning and measurement of muntins.
Light, handy and applicable in every working plane.**

version:

- SPM measurement range 1,3 m

field of application:

- Device for central positioning of arbitrary wide muntins in the window-, door- and facade production.
- For positioning of muntins according to measures.

characteristics:


- It is used pairwise in horizontal working position.
- Use is also possible in vertical position in connection with option vacuum suction cup.
- Little weight and good handling due to balancing of centre of gravity.
- The outer runners (Pos. 4 and 7) always move synchronously.

handling for central positioning:

- Lay both SPM in the required position on the window, apply the runners (Pos. 4 and 7) outwards and clamp.
- Set the middle runner (Pos. 9) to half the value of the muntin wide and clamp.
- Lay the muntin on the contact edge of the middle runner (Pos. 9) and remove the protective foil sideways.

handling for positioning according to measures:

- Lay both SPM in the required position on the window.
- Set the runner (Pos. 7) or the middle runner (Pos. 9) according to measure and clamp. Apply the runner (Pos. 4) to the frame or the glass strip.
- Lay the muntin on the contact edge of the runner (Pos. 7) or the contact edge of the middle runner (Pos. 9) and remove the protective foil sideways.

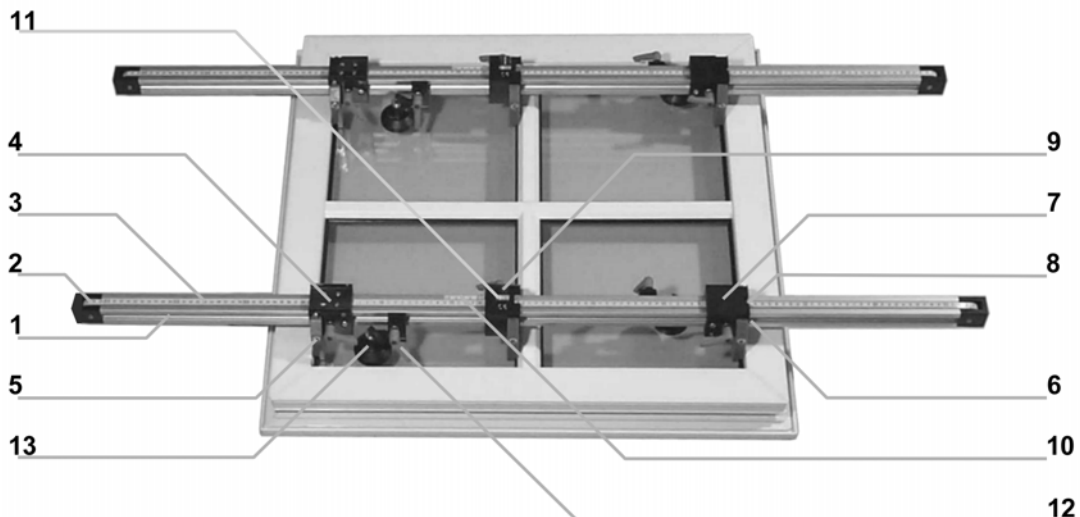**option:**

- special length: SPM measurement range up to 1,6 m or up to 2,0 m
- vacuum suction cup (Pos. 12, 13)

**GmbH Geräte- und Vorrichtungsbau**

tel.: 035828 / 72255

fax: 035828 / 70743

Sohländer Str. 2 02894 Reichenbach OLinternet: <http://www.gevo-gmbh.de>e-mail: kontakt@gevo-gmbh.de